

# HIKOKI

UNLEASH the NEXT

Cordless Finish Nailer

18V - 3.0Ah NT 1865DA

NEW

BRUSHLESS



16Ga Angle 20° / 65mm

18V Cordless  
Finish Nailer  
NT1865DBAL

15Ga / 65mm



18V Cordless  
Finish Nailer  
NT1865DBSL

16Ga / 65mm



18V Cordless  
Brad Nailer  
NT 1850DBSL

18Ga / 50mm




# Easy to Use with Great Comfort

# Easy to Use with Great Comfort

## 1 Lower Running Cost

The NT 1865DA cordless finish nailer does not require a gas cartridge to operate. This results in a considerably lower running cost than gas-powered nailers.

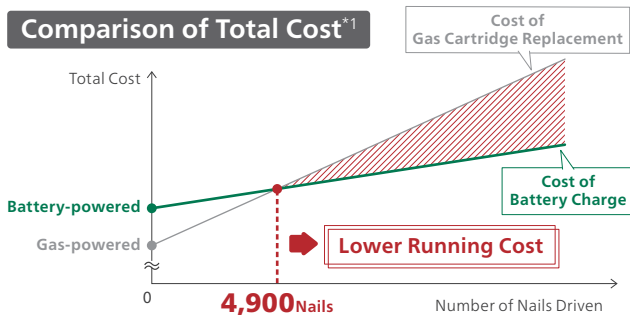

## 2 Less Maintenance

No gas means that no regular cleaning of the combustion chamber that a gas model would require.

## 3 Consistent Performance

The NT 1865DA offers consistent performance in harsh environments at low temperatures or high altitudes.

## 4 Great Comfort

The NT 1865DA produces no combustion noise, no gas fumes, and low vibration, which helps to create a cleaner, safer working environment.

## 5 Dry-fire Lockout

Dry-fire lockout prevents blank activation, prolonging tool life and protecting work surfaces from damage.

Approx. **1,200** Nails per Charge\*2

16Ga. Angle

Equipped with brushless motor technology and powered by a compact 3.0Ah Lithium on battery, the NT 1865DA is capable of driving up to 1,200 nails per charge.

★ Tool-less Depth of Drive Adjustment

★ LED Light

★ Integrated Hook

**Cordless Finish Nailer**

18V - 3.0Ah  
NT 1865DA

*BRUSHLESS*



### Specifications

Model	NT 1865DA	
Driving System	Air Spring	
Nail Length	32mm to 65mm	
Driving Speed	3 nails/sec. (Intermittent)	
Loading Capacity	100 nails (2 strips)	
Firing Mode	Full Sequential / Contact (Selectable)*3	
Battery Voltage	18V	
Dimensions	H x L	323mm x 298mm (with BSL1830C)
	H x L	323mm x 310mm (with BSL36A18)
Weight*4	3.4kg (with BSL1830C)	
	3.7kg (with BSL36A18)*5	
	4.0kg (with BSL36B18)*5	
Standard Accessories*6	2 Batteries (BSL1830C), Charger (UC18YFSL), Battery Cover, Nose Cap, Carrying Case, Safety Glasses	

\*1. Without the cost of nails.

\*2. The value shown is for reference purposes and may vary according to the workpiece materials and other operating conditions.

\*3. For New Zealand, only full sequential mode.

\*4. Weight: according to EPTA-Procedure 01/2014.

\*5. Sold separately.

\*6. Standard accessories vary by country or area.

Distributed by: