

HIKOKI

UNLEASH the NEXT

Cordless Spotlight
18V UB 18DH



Battery sold separately.

**Far-Reaching Spotlight
with a 670m Lighting Distance**

Spot and Wide Beams Cover Far Distance and Wide Area

670m
Lighting Distance*1

► **Lightweight and Portable**

0.8Kg | **1.5Kg**
without battery | with BSL36A18 battery

Spot and Wide Beam Modes for Different Applications

There are two beam mode options of either a broad floodlight or a focused far-reaching spotlight.



3 Brightness Settings with Strobe Function

Brightness Adjustment Range

	Spot	Wide
High	950lm	1,050lm
Medium	750lm	800lm
Low	400lm	450lm
Strobe	950lm	1,050lm


Adjustable Lighting Angle

The lighting angle is six step adjustable from 0° to 90°.



Two Different Hooks

In addition to a belt hook, the UB18DH features a hanging hook on its head for extra versatility. When using hooks, make sure that the spotlight is securely hung.

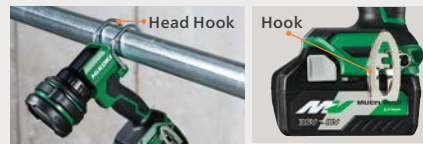

Color Plates

Optional color metal plates allow for customization as per user's liking.



Cordless Spotlight

18V UB 18DH



Specifications

Model		UB 18DH
Battery Voltage		18V
Beam Distance (Spot Mode)	High	670m / 730yds
	Medium	570m / 620yds
	Low	420m / 460yds
Brightness Adjustment Range (Spot / Wide)	High	950lm / 1,050lm
	Medium	750lm / 800lm
	Low	400lm / 450lm
LED (White)		10W
Dimensions (L x W x H)	Head angle 90°	174 x 101 x 242mm (without Battery)
	Head angle 0°	109 x 101 x 334mm (without Battery)
Weight*2		1.1 kg (with BSL1830C Battery)*3 1.7 kg (with BSL36B18 Battery)*3

Continuous Runtime per Charge*4

Battery	18V			
	High	Medium	Low	Strobe
3.0Ah	Approx. 4.5h	Approx. 7h	Approx. 14.5h	Approx. 9.5h
5.0Ah	Approx. 8h	Approx. 12h	Approx. 24h	Approx. 15.5h
8.0Ah	Approx. 12.5h	Approx. 19h	Approx. 38.5h	Approx. 25h

*1. When in spot mode.

*2. Weight: according to EPTA-Procedure 01/2014.

*3. Sold separately.

*4. Actual runtimes may vary according to types of batteries and operating conditions.

Distributed by: