

HIKOKI

UNLEASH the NEXT

Cordless Impact Driver

36V - 2.5Ah WH 36DC

NEW



The Ideal Combination of Power & Comfort

BRUSHLESS

MV
MULTI VOLT

The Ideal Combination of Power and Comfort


Industry's Most Compact Head and Lightest Weight*1

With the most compact head and lightest weight in its class*1, the WH36DC is more compact yet as powerful as its predecessor (WH36DB). This makes the tool easy to use and ideal for limited space applications.



Triple LED Lights for Superior Visibility

Three LED lights illuminate a wide area without shadows getting in the way.

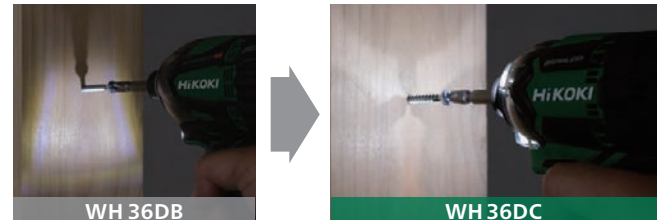



Cordless Impact Driver

36V - 2.5Ah
WH 36DC **NEW**




BRUSHLESS
TRIPLE HAMMER
IP56

High Torque and High Speeds Help You Get the Job Done Quickly

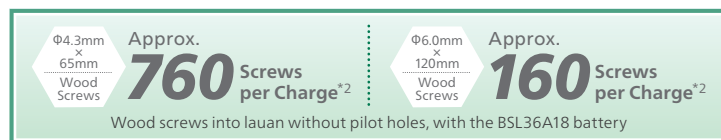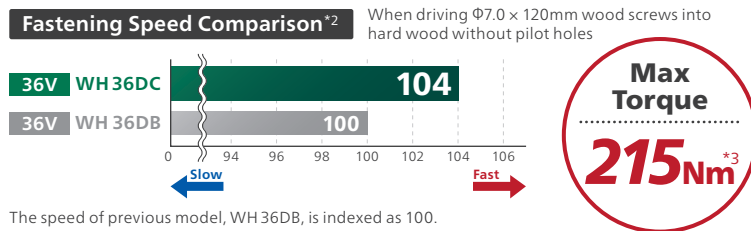

5 Tightening Modes for Various Applications

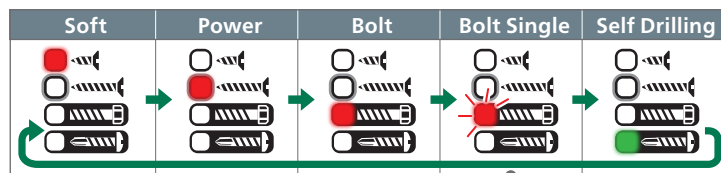

Upon pulling the trigger switch in bolt single mode, the driver will automatically stop after applying a number of impacts.

Specifications

Model	WH 36DC	
Capacity	Small Screw	4 - 10mm
	Ordinary Bolt	5 - 18mm
	High Tension Bolt	5 - 14mm
	Self Drilling Screw	$\Phi 3.5 - \Phi 6\text{mm}$
Drive	6.35mm	
Max. Tightening Torque*3	215Nm	
Battery Voltage	36V	
No Load Speed	Soft Mode	0 - 900/min
	Power Mode	0 - 3,400/min
	Bolt Mode	0 - 2,900/min
	Bolt Single Mode	0 - 2,900/min
	Self Drilling Screw Mode	0 - 3,700/min
Impact Rate	Soft Mode	0 - 2,000/min
	Power Mode	0 - 4,100/min
	Bolt Mode	0 - 4,100/min
	Bolt Single Mode	0 - 4,100/min
Self Drilling Screw Mode	0 - 2,200/min	
Overall Head Length	114mm	
Weight*4	1.6kg (with BSL36A18) 1.9kg (with BSL36B18)*5	
Standard Accessories*6	2 Batteries (BSL36A18), Charger (UC18YSL3), Hook, Battery Cover, Carrying Case	

*1. As of January 2022, among 36V cordless impact drivers made by leading power tool manufacturers. (Survey by Koki Holdings)

*2. The values shown are for reference purposes and may vary according to the workpiece materials and other operating conditions.

*3. When tightening an M16 high-tension bolt (Grade 10.9) for three seconds with the socket adapter and the hexagon socket (40mm in overall length) attached.

*4. Weight: according to EPTA-Procedure 01/2014.

*5. Sold separately.

*6. Standard accessories vary by country or area.

Distributed by:

